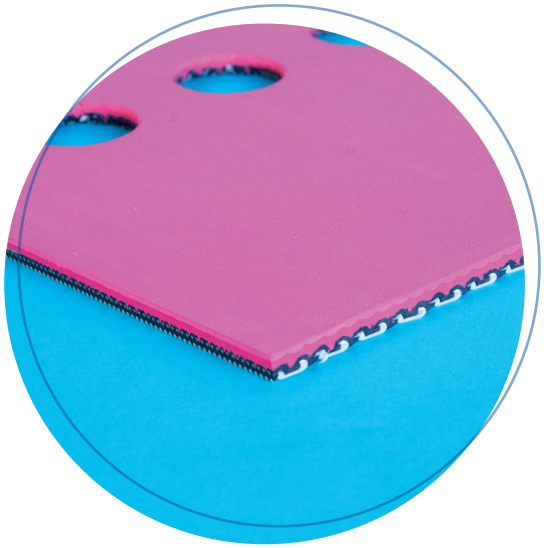

LINATEX spiral thickness 6.7 mm.

Identification Code	EB-LIN/67

GENERAL INFORMATION:

Product type	Easybelt®
Market segment	Cardboard, Wood
Main feature	Excellent surface grip, Wear resistant
Belt support	Rollers, Plastic

BELT COMPOSITION:

Bottom cover	SBR
Central structure	Spiral with weft monofilament
Top cover	NR

TECHNICAL DATA:

Anti-static	Yes
Top cover hardness	38 Shore A
1% elongation force	18 N/mm.
Belt thickness	6,7 mm.
Weight	6,6 kg/m²
Top cover thickness	4 mm.
Operating temperature	from -40° to 90 °C
Maximum temperature	110 °C
Min. roller diameter	90 mm.
Min. reverse bending diameter	120 mm.
Standard width	2.000 mm.
Maximum width	2.400 mm.

All information is applied at an optimal ambient temperature of 20°C and may therefore vary based on environmental conditions.

Rainbow Rubber and Plastic
113 Dries Road
Reading, PA 19605

Phone: (610) 685-2800
FAX (610) 685-7574
Website: www.rainbowbelts.com