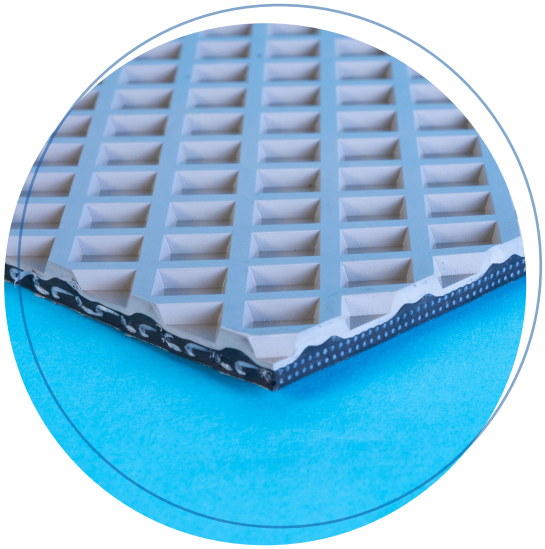

# Spiral Sanding Belt 7 mm.

| Identification Code | EB-LEG/75 |
|---|---|

## GENERAL INFORMATION:

| | |
|---|---|
| **Product type** | Easybelt® |
| **Market segment** | Wood |
| **Main feature** | Wear resistant, fast joining speed |
| **Belt support** | Sliding plates, rollers, flat beds |

## BELT COMPOSITION:

| | |
|---|---|
| **Bottom cover** | Polyester |
| **Central structure** | Spiral |
| **Top cover** | Grey rubber |

## TECHNICAL DATA:

| | |
|---|---|
| **Anti-static** | Yes |
| **Top cover hardness** | 57 Shore A ± 5 |
| **1% elongation force** | 20 N/mm. |
| **Belt thickness** | 7 mm. ± 0,5 |
| **Weight** | 7 kg/m² |
| **Top cover thickness** | 3,4 mm. ± 0,5 |
| **Operating temperature** | from -18 °C to 95°C |
| **Maximum temperature** | 120 °C for 20 seconds |
| **Min. roller diameter** | 95 mm. |
| **Min. reverse bending diameter** | 180 mm. |
| **Standard width** | 1.400 mm. |
| **Maximum width** | 2.200 mm. |

All information is applied at an optimal ambient temperature of 20°C and may therefore vary based on environmental conditions.

**Rainbow Rubber and Plastic**
**113 Dries Road**
**Reading, PA 19605**

**Phone: (610) 685-2800**
**FAX (610) 685-7574**
**Website: www.rainbowbelts.com**